



BOSCH

Invented for life

Bosch KFN96APEA

Serie | 6 French door bottom freezer

General Information:

Main colour of product: Inox-easyclean

Door hinge: Left & Right

Hinge type: Flush-folding

Door handle type: Integrated handle horizontal and vertical

Never defrost again with Full NoFrost

Dry air constantly circulating, your fridge-freezer stays ice-free, with no need to defrost.

Type of control setting and signalling devices: Super setting for freezer, Super setting fridge, Temperature display fridge, Temperature for freezer, Warning function freezer sect., Warning signal door open, Warning signal for malfunction

Energy Efficiency Class: E

Average annual energy consumption in kilowatt hour per year (kWh/a): 333 kWh/annum

Sum of volume of chill compartments: 405 l

Sum of volume of frozen compartments: 200 l

Airborne acoustical noise emission class: C

Climate Class: Extended temperate, Subtropical, Temperate, tropical

Size and weight:

Dimensions: 1830 x 910 x 731.0 mm

Net weight: 118.3 kg

Comfort:

VitaFresh: Yes

The VitaFresh system offers the ideal storage environment for all your fresh food thanks to climate and temperature control.

SuperCooling: Yes

The Super Cooling function lowers the temperature in your fridge temporarily so new items are cooled faster and all food stays fresh.

superFreezing: Yes

BigBox: Yes

Guarantee: 5 years parts & labour



Cooling:

Number of shelves in fridge compartment: 4

Number of Adjustable Shelves in fridge compartment (Stck): 3

No. of egg racks: 3

Number of Door Bins – Refrigerator: 4

Freezing:

Star Rating: 4

Storage Period in Event of Power Failure (h): 15 h

Freezing drawers (Stck): 6

Connectivity:

Smart Appliance: Yes



Use mobile devices to control and monitor your machine remotely via Home Connect. Home Connect Features

Remote Diagnostics, Remote Monitoring and Control

Technical Information:

220 – 240 V

Dimensions: H183 W91 D73.1 cm

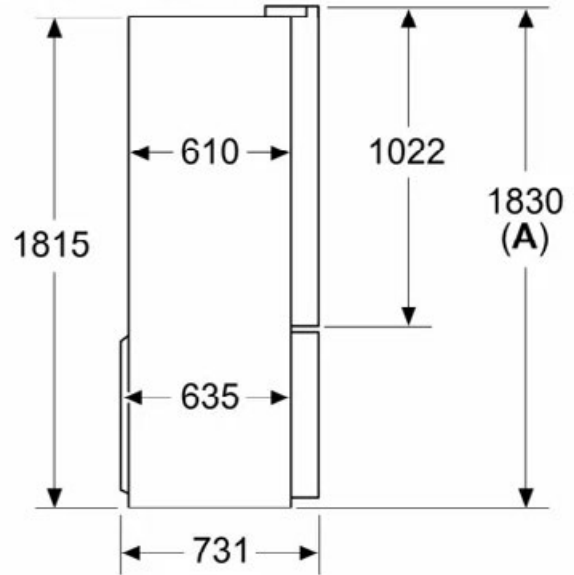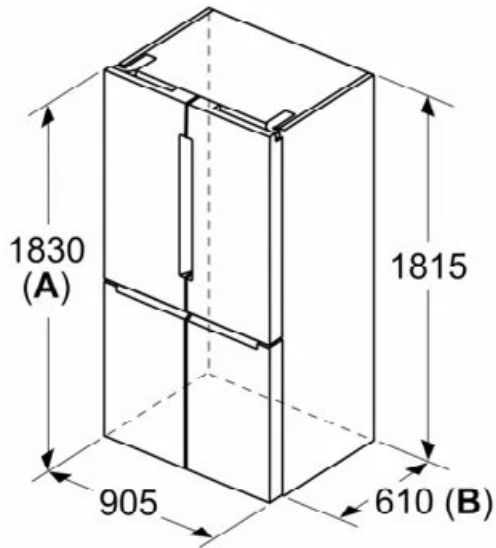

A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended
B: Add 25 for fixed spacers on back

A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended

measurements in mm

