

N 70, Built-in compact oven, 60 x 45 cm, Flex Design  
C29CR7KY0



A+

✓ Soft Close with Soft Opening - the damping system cushions the door for gentle opening and closing

#### Features

##### Technical Data

Gross weight : 33.6 kg  
 Built-in / Free-standing : Built-in  
 Integrated Cleaning system : Pyrolytic+Hydrolytic  
 Min. required niche size for installation (HxWxD) : 450-455 x 560-568 x 550 mm  
 Dimensions : 455 x 596 x 548 mm  
 Dimensions of the packed product (HxWxD) : 530 x 660 x 690 mm  
 Control Panel Material : Glass  
 Door Material : Glass  
 Net weight : 31.3 kg  
 Usable volume of cavity : 47 l  
 Heating modes : Bottom heat, Circulating air, Circulating air gentle, Conventional heat, Conventional heat gentle, Dough proving setting, Full width grill, Half width grill, Hot air grilling, low temperature cooking, pre-heating, warming  
 Number of interior lights : 1  
 Length electrical supply cord : 150.0 cm  
 Interior Lights - cavity 1 : 1  
 Pull-out system : Clip rails  
 Included accessories : 1 x grid, 1 x universal pan  
 Broil Element Wattages cavity 1 : 2800 W  
 Energy efficiency class (2010/30/EC) : A+  
 Energy consumption per cycle conventional (2010/30/EC) : 0.73 kWh/cycle  
 Energy consumption per cycle forced air convection (2010/30/EC) : 0.61 kWh/cycle  
 Energy efficiency index (2010/30/EC) : 81.3 %  
 Connection Rating : 2900 W  
 Fuse protection : 13 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz  
 Plug type : GARDY plug w/ earthing  
 Energy input : Electric  
 Required cutout/niche size for installation (in) : x  
 Dimensions of the packed product : 20.86 x 25.98 x 27.16  
 Net weight : 69.000 lbs  
 Gross weight : 74.000 lbs  
 Length electrical supply cord : 150.0 cm  
 Net weight : 31.3 kg

#### Included accessories

1 x grid, 1 x universal pan

#### Optional accessories

Z11AB15A0 : , Z11AU15A0 : , Z11CR10X0 : , Z11SZ00X1 : ,  
 Z12CB10A0 : , Z12CM10A0 : , Z12CP10A0 : , Z12CU10A0 : ,  
 Z1365WX0 : , Z13CR10X0 : , Z13CV05S0 : , Z13CV06S0 : ,  
 Z1608CX0 : , Z1655CA0 : , Z1913X0 : , Z9045AY0 : , Z9045BY0 : ,  
 Z9045DY0 : , Z9045MY0 : , Z9060AY0 : , Z9060BY0 : , Z9060DY0 : ,  
 Z9060MY0 : , Z9075AY0 : , Z9075BY0 : , Z9075DY0 : , Z9075MY0 : ,  
 Z9098AY0 : , Z9098BY0 : , Z9098DY0 : , Z9098MY0 : , Z9105AY0 : ,  
 Z9105BY0 : , Z9105DY0 : , Z9105MY0 : , Z912AAY0 : , Z912ABY0 : ,  
 Z912ADY0 : , Z912AMY0 : , Z912BAY0 : , Z912BBY0 : , Z912BDY0 : ,  
 Z912BMY0 : , Z990AAY0 : , Z990ABY0 : , Z990ADY0 : , Z990AMY0 : ,  
 Z990BAY0 : , Z990BBY0 : , Z990BDY0 : , Z990BMY0 : , Z99RX70X0 :



4 242004 266556

N 70, Built-in compact oven, 60 x 45 cm, Flex

Design

C29CR7KY0

## Features

### Type of oven / heating system:

- Temperature range 40 °C - 275 °C
- Cavity volume: 47 l

### Hook-in racks / rails

- Number of shelf levels: 3 PC
- full extension, pyrolitic proof, Cliprails, with Stop function

### Design:

- Touch control
- Cavity inner surface: enamel anthracite

### Cleaning:

- Pyrolytic self-cleaning function
- Cleaning aid
- Full glass inner door - safer touch door

### Comfort:

- Electronic clock
- Temperature proposal  
Actual temperature display Optical temperature control
- soft opening, Drop down door
- Supporting systems: Dish Assist
- Rapid heating-up
- Halogen interior lighting, Independent oven interior light button
- Cooling fan
- Stainless-steel fan
- HomeConnect ready on Wi-Fi

### Accessory:

- grid, universal pan

### Environment and Safety:

- Low door temperature
- Low door temperature during pyrolitic cleaning
- Automatic door lock during pyrolysis  
Individual adjustable child lock Safety switch off Residual heat indicator Start-/Stop button Door contact switch

### Technical Information

- Length of mains cable: 150 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 2.9 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+(at a range of energy efficiency classes from A+++ to D)  
Energy consumption per cycle in conventional mode:0.73 kWh  
Energy consumption per cycle in fan-forced convection mode:0.61 kWh  
Number of cavities: 1 Heat source: electrical Cavity volume:47 l

### Dimensions:


- Appliance dimension (hxwxd): 455 mm x 596 mm x 548 mm
- Niche dimension (hxwxd): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- "Please reference the built-in dimensions provided in the installation drawing"

N 70, Built-in compact oven, 60 x 45 cm, Flex

Design


C29CR7KY0

Dimensioned drawings

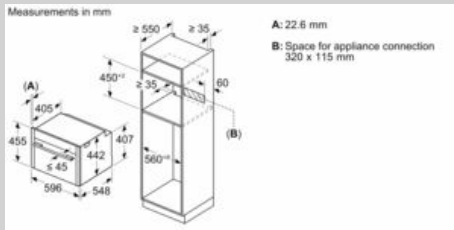


If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

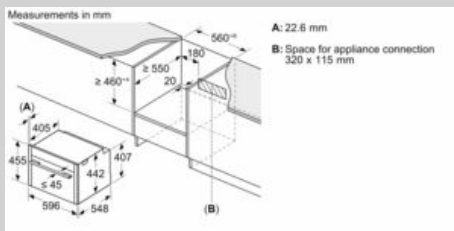

Installing two appliances on top of each other  
Air exchange

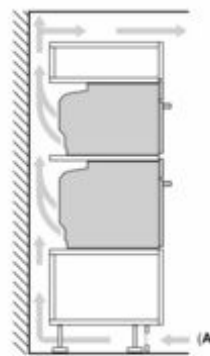

A: Air inlet  $\geq 200 \text{ cm}^2$

Installation with a hob.

