

## Series 6, wall-mounted cooker hood, 80 cm, clear glass black printed DWK81AN60



A+



- Extra power when you need stronger ventilation.
- Alexa Voice Control: manage your appliances with your voice, thanks to the Amazon Alexa.
- Hob-based hood control: Convenient control of cooker hood functions via the hob.
- Home Connect: hoods with smart connectivity for an easier everyday life.
- Eco Silence Drive: the powerful, energy-saving drive for hoods.

DWZ0BX6K1 Chimney extension 1000 mm  
 DWZ0BX6L1 Chimney extension 1500 mm  
 DWZ1BK1B6 Clean Air Plus odor filter (replacement)  
 DWZ1BK1I6 Clean Air Plus recirculation kit  
 DWZ1BK1P1 Long Life odor filter (replacement)  
 DWZ1BK1R1 Long Life recirculation kit (chimless)  
 DWZ1BK1S1 Long Life recirculation kit  
 DWZ1BK1V6 Clean Air Plus recirc. kit (chimless)  
 HEZG9AS00S Adapter

Typology: .....Wall-mounted  
 Length electrical supply cord: ..... 130.0 cm  
 Height of the chimney: ..... 420-663/457-750 mm  
 Height of product, without chimney: ..... 450 mm  
 Net weight: ..... 24.1 kg  
 Type of control: .....Electronic  
 Number of speed settings: ..... 3-stages + intensive setting  
 Max. air extraction: ..... 432 m<sup>3</sup>/h  
 Boost position output recirculating: ..... 886 m<sup>3</sup>/h  
 Max. air recirculation: ..... 438 m<sup>3</sup>/h  
 Boost position air extraction: ..... 915 m<sup>3</sup>/h  
 Number of lights: ..... 2  
 Noise level: ..... 51 dB(A) re 1 pW  
 Diameter of air outlet: ..... 150 mm  
 Grease filter material: ..... Washable stainless steel  
 Odour filter: ..... No  
 Operating Mode: ..... Exhaust / Recirculation (Accessory available separately)  
 Optional accessories: .....DWZ0BX6K1, DWZ0BX6L1, DWZ1BK1B6, DWZ1BK1I6, DWZ1BK1P1, DWZ1BK1R1, DWZ1BK1S1, DWZ1BK1V6, HEZG9AS00S  
 Grease filter type: .....Kassette  
 Connection rating: ..... 200 W  
 Fuse protection: .....10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Plug type: ..... Gardy plug w/ earthing  
 Installation typology: .....Wall-mounted  
 Material body: .....Glass, Lacquered  
 Plug type: ..... Gardy plug w/ earthing  
 Dimensions of the product, with chimney (if exists) (in): .....x x  
 Dimensions of the packed product: ..... 30.31 x 28.74 x 48.42  
 Net weight: ..... 53.000 lbs  
 Gross weight: ..... 78.000 lbs  
 Motor location: ..... Integrated motor in hood body  
 No-return airflow flap: ..... Yes  
 Length electrical supply cord: ..... 130.0 cm  
 Dimensions of the product, with chimney (if exists): ..... 892-1185 x 790.0 x 433.0 mm  
 Dimensions of the packed product (HxWxD): ... 770 x 730 x 1230 mm  
 Net weight: ..... 24.1 kg  
 Gross weight: ..... 35.4 kg




## **Series 6, wall-mounted cooker hood, 80 cm, clear glass black printed DWK81AN60**

---

- Inclined design
- Glass plate: clear glass black printed
- Suitable for ducted or re-circulated extraction
- In recirculation operation chimneyless use possible
- Efficient BLDC-technology
- Colour Temperature: 3500 K
- Light Intensity: 422 lux
- 3 speeds plus intensive setting
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Easy to clean smooth surfaces and materials.
- easy to clean Innerframe
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 35.5 kWh/year
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: C
- Power rating: 200 W
- Voltage: 220 - 240 V
- Dimensions exhaust air (HxWxD): 855-1098 x 790 x 433 mm
- Dimensions recirculating (HxWxD): 892-1185 x 790 x 433 mm
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Electrical cable length 1.3 m
- with one-way flap


## Series 6, wall-mounted cooker hood, 80 cm, clear glass black printed DWK81AN60

Measurements in mm

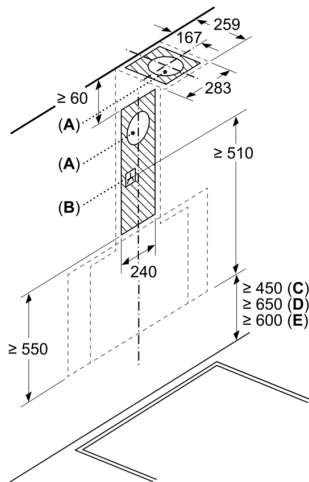


- A: Exhaust-air outlet
- B: Socket
- C: Electric
- D: Gas - from upper edge of pan support
- E: Electric - for Australia and New Zealand

Measurements in mm  
Wall installation with chimney

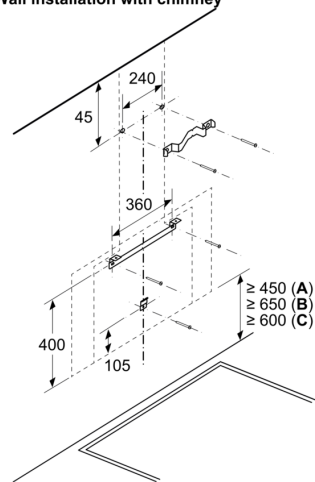

- A: Electric
- B: Gas - from upper edge of pan support
- C: Electric - for Australia and New Zealand


Measurements in mm

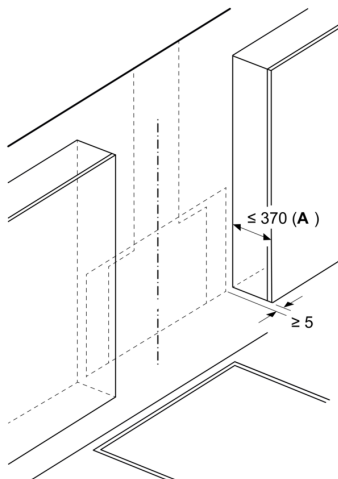


- A: Max. depth of side upper cabinets (incl. door) due to installation of glass plate

Appliance must be installed before upper cabinets, if these are deeper than 370 mm


Measurements in mm  
Appliance in exhaust air mode

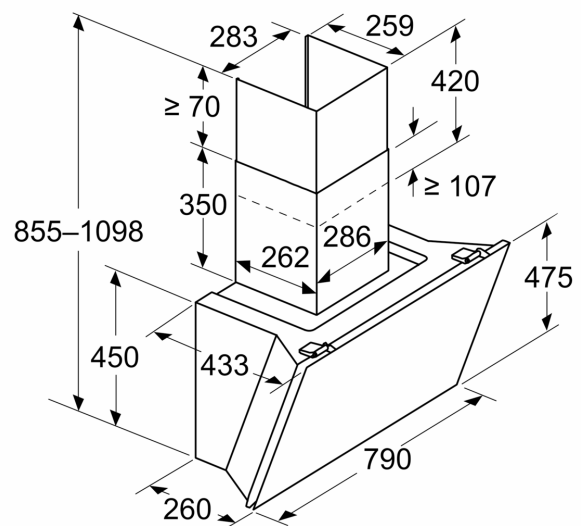

Measurements in mm  
**Appliance in circulated air mode**

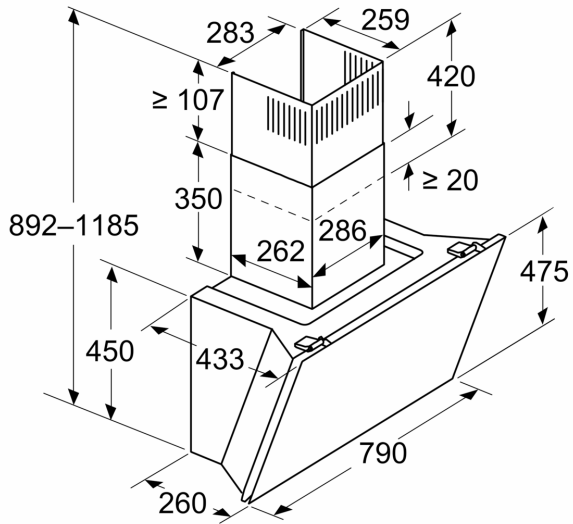


Measurements in mm  
**Appliance in circulated air mode without duct**

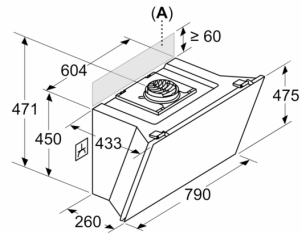

Socket can be fitted to the side of or above the appliance

A: Socket only outside the marked area

Measurements in mm

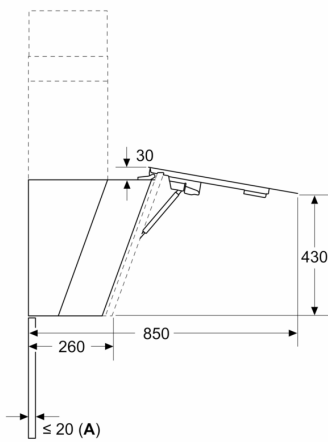

A: Max. back wall thickness