

N 70, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE
G17813CE0



1 x ice cube tray	
KS0B0SZ0	Heavy-duty hinge support

- This NoFrost built-in freezer needs no defrosting and features a malfunction warning signal in case of increasing temperature.
- ✓ No Frost – No more defrosting your freezer.
 - ✓ Vario Zone – Individualize your drawers with various loading options to create the optimal fit.
 - ✓ Damped Hinge – Enjoy the soft silence. The door will softly close itself once the angle reaches 20°.
 - ✓ Flex Door Storage - Additional space for all your bottled needs.
 - ✓ Made in Germany - Made with quality that lasts.

Energy Efficiency Class (Regulation (EU) 2017/1369):	E
Average annual energy consumption in kilowatt hour per year (kWh/a):	235 kWh/annum
Sum of volume of frozen compartments:	212 l
Airborne acoustical noise emissions :	35 dB(A) re 1pW
Airborne acoustical noise emission class:	B
Product category:	Upright freezer
Design:	Built-in
Frost free system:	Fridge and freezer
Climate class:	SN-T
Door panel options:	Not possible
Width of the appliance:	558 mm
Depth of the product:	545 mm
Dimensions of the packed product (HxWxD):	1840 x 610 x 640 mm
Required niche size for installation (HxWxD):	1775 x 560 x 550 mm
Warning signal / malfunction:	Both visual and audible
Defrost:	Automatic
Cover door installation system:	Fixed-mounted
Number of drawers/baskets (Stck):	5
Number of freezing flaps (Stck):	2
Lockable door:	No
Thermometer freeze section:	Digital
Light:	No
Length electrical supply cord:	230.0 cm
Door hinge:	Left reversible
Net weight:	64.9 kg
Gross weight:	69.2 kg
Multi-Flow Air Tower:	No
Number of compressors:	1
Number of independent cooling systems:	1
Economy setting:	No
Fast freezing function:	Yes
Door bin adjustability - Freezer:	No
Tilt-out door bins in freezer:	No
Number of shelves - Freezer:	0
Door bin adjustability - Freezer:	No
Shelf Material - Freezer:	Safety glass
Reversible Door Hinge:	Yes
Fuse protection:	10 A
Frequency:	50 Hz
Door panel options:	Not possible
Installation typology:	Integrated
Noise level:	36 dB(A) re 1pW
ENERGY STAR® certified:	No
Plug type:	Gardy plug w/ earthing
Required cutout/niche size for installation (in):	3

Dimensions of the packed product: 72.44 x 24.01 x 25.19
Net weight: 143.000 lbs
Gross weight: 152.000 lbs
Included accessories: 1 x ice cube tray



N 70, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT
CLOSE FLAT HINGE
G17813CEO

Performance and consumption

- Energy Class: E
- Total Volume: 212 l
- Annual Energy Consumption: 235 kWh/a
- Fast Freeze Facility
- Noise Level : 35 dB , B Class

Design and Styling

Convenience & Safety

- No Frost
- 7 segment electronic control
- Flat hinge
- 1 compressor/1 cold circuit
- Super Freezing: Manual/automatic activation
- Acoustic Warning System, Warning System by temperature increase

Freezer Section

- Net Freezer Volume : 212 l
- Net 4* compartment volume : 212 l
- Freezing capacity 24h: 13.8 kg
- Temperature rise time : 8 H
- 2 transparent hinged compartments
- 5 transparent freezer drawers, incl.2 x big box

Technical Information

- Door left hinged, reversible
- Nominal voltage: 220 - 240 V
- Climate Class: SN-T
- Length of power cord: 230 cm

Dimensions

- Niche Dimension (H x W x D): 177.5 cm x 56.0 cm x 55.0 cm
- Appliance Dimensions (H x W x D): 177.2 cm x 55.8 cm x 54.5 cm

Accessories


- ice cube tray
- ice cube tray

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

General Information

N 70, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT
CLOSE FLAT HINGE
G17813CE0


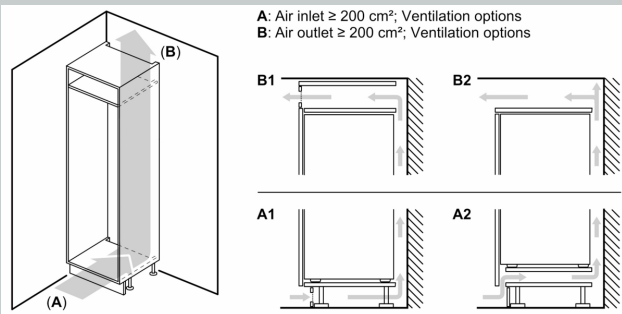



Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

Δ Weight
A: Appliance door height including hinges in mm
B: Undamped hinge, unit front in kg
C: Damped hinge, unit front in kg
D: Additional possible load in kg with heavy load kit


A	B	C	D
1500-1750	22	22	B+5 / C+5
720-1400	19	19	
A1	15	19	
A2	15	19	

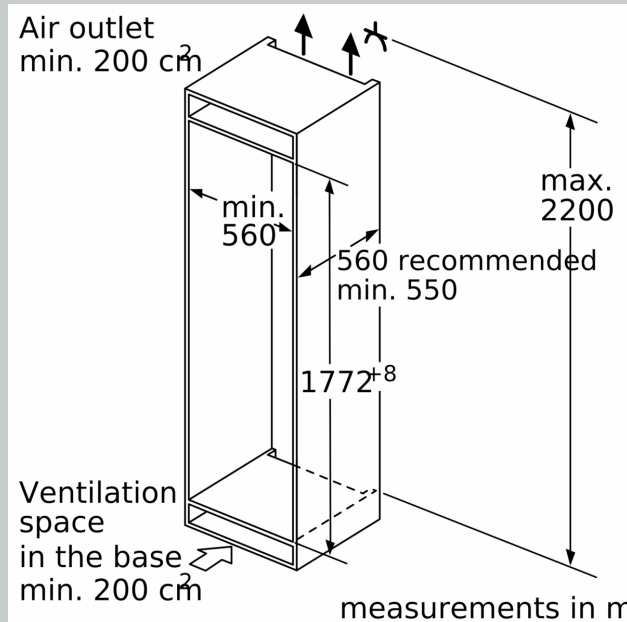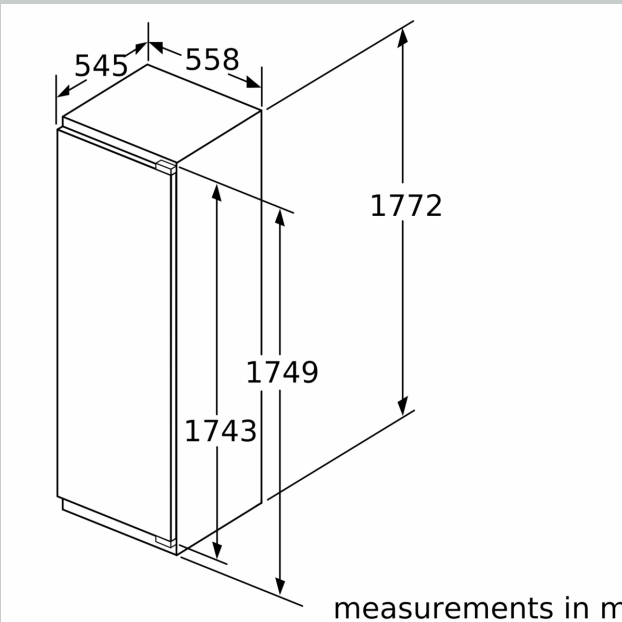

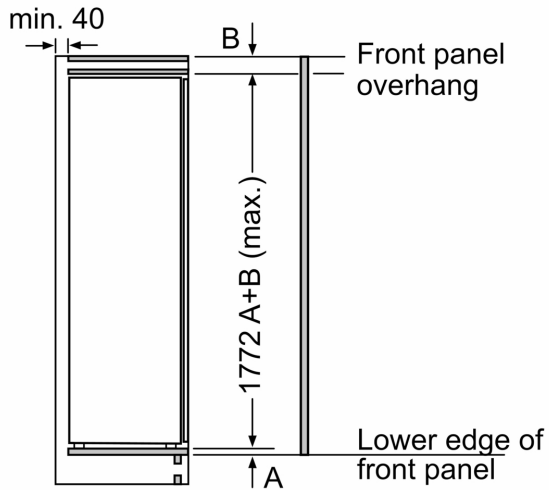

measurements in mm


Maximal permissible weight of the unit fronts



Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door Hinges in mm:	undamped hinge, Door in kg:	damped hinge, Door in kg:
1500-1750	22	22

measurements in mm
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.