


**Series 6, Gas hob, 90 cm, Stainless steel
PCR9A5I90**

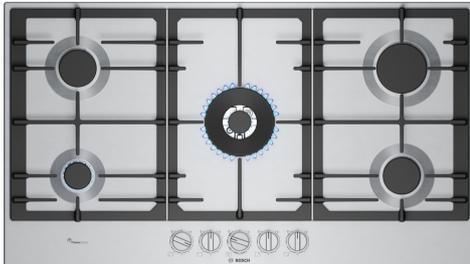

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Easy cleaning:** detachable knobs and dishwasher-suitable pan supports make cleaning a breeze.
- **Dishwasher-suitable pan supports:** make cleaning your hob even easier.
- **Continuous cast-iron pan support:** for high firmness and stability of cookware.
- **Automatic gas cut-off:** ensures safety by instantly cutting off gas supply if the flame goes out.

Optional accessories

HEZ298105	Simmer plate
HEZ298107	Wok ring
HEZ298114	Small pot support
HEZ32WA00	Wireless food thermometer
HEZ9SE040	4 pieces Set
HEZ9SE060	6 pieces Set

Technical Data

Product name/family: gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Total number of positions that can be used at the same time: 5
 Required niche size for installation (HxWxD): 45 x 850-850 x 490-500 mm
 Width of the appliance: 915 mm
 Dimensions: 45x915x520 mm
 Dimensions of the packed product (HxWxD): 175x1110x660 mm
 Net weight: 16.3 kg
 Gross weight: 18.8 kg
 Residual heat indicator: No
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 100 cm
 Knob Material: Full metal
 Sealed Burners: No
 Type of pan support: Elongated cast iron pan support
 Power of heating element (kW): 1000 W
 Power of 3rd heating element (kW): 1750.00 W
 Power of 5th heating element (kW): 3000 W
 Connection rating: 1 W
 Gas connection rating: 12500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Energy input: Gas
 Gas type preset: Nat gas H/E/(L) 20 (25) mbar
 Certified gas types: Liquid gas G30,31 28-30/37mbar
 Plug type: No plug (electrical connection by electrician)
 Appliance Dimensions (h x w x d) (in): x x
 Dimensions of the packed product: 6.88 x 25.98 x 43.70
 Net weight: 36.000 lbs
 Gross weight: 41.000 lbs
 Total number of positions that can be used at the same time: 5
 Length electrical supply cord: 100 cm
 Required niche size for installation (HxWxD): 45 x 850-850 x 490-500 mm
 Dimensions: 45x915x520 mm
 Dimensions of the packed product (HxWxD): 175x1110x660 mm
 Net weight: 16.3 kg
 Gross weight: 18.8 kg

Series 6, Gas hob, 90 cm, Stainless steel PCR9A5I90

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

Design

- Stainless steel surface
- Cast iron continuous pan supports
- Metal knobs

Usage convenience

- FlameSelect: precisely adjust the flame in nine defined and repeatable levels.
- Sword knobs, front: easily access knobs in front with strong grip for effortless turning.
- Automatic ignition: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Including Dual wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 5 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Cleaning

- Removable knobs for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.

Safety


- Safety gas cut-off: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Preset for natural gas (20mbar)
- Nozzle set for Preset for natural gas (20mbar). Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 51.5 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Min. worktop thickness: 20 mm
- For raised installation, it is possible to install in worktops that are between 12 mm and 20 mm by using a spacer, which is available from technical customer service.
- Power cord: 1 m
- Connected load: 12.5 KW

Series 6, Gas hob, 90 cm, Stainless steel PCR9A5190

Measurements in mm

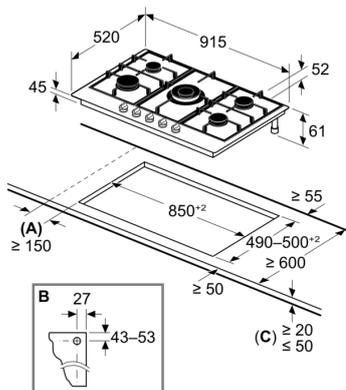

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven

For worktop thickness between 12 mm to 20 mm need additional spacer, contact customer service for details