


**Series 6, Gas hob, 90 cm, Tempered glass, Black
PPM9A6I40**

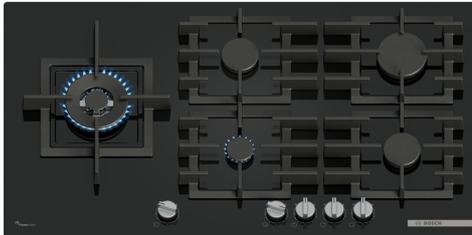

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Easy cleaning:** detachable knobs and dishwasher-suitable pan supports make cleaning a breeze.
- **Dishwasher-suitable pan supports:** make cleaning your hob even easier.
- **Semi-continuous pan supports:** smaller for easy cleaning, yet providing a seamless cooking surface.
- **Automatic gas cut-off:** ensures safety by instantly cutting off gas supply if the flame goes out.

Optional accessories

HEZ298105	Simmer plate
HEZ298107	Wok ring
HEZ298114	Small pot support
HEZ32WA00	Wireless food thermometer
HEZ9SE040	4 pieces Set
HEZ9SE060	6 pieces Set

Technical Data

Product name/family: gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Total number of positions that can be used at the same time: 5
 Required niche size for installation (HxWxD): 45 x 850-850 x 490-500 mm
 Width of the appliance: 915 mm
 Dimensions: 45x915x520 mm
 Dimensions of the packed product (HxWxD): 170x1120x660 mm
 Net weight: 22.9 kg
 Gross weight: 26.3 kg
 Residual heat indicator: No
 Location of control panel: Front
 Basic surface material: Tempered glass
 Color of surface: Black
 Color of frame: Black
 Length electrical supply cord: 100 cm
 Knob Material: Full metal
 Sealed Burners: No
 Power of 2nd heating element (kW): 4000 W
 Power of 4th heating element (kW): 1750.00 W
 Power of 5th heating element (kW): 3000 W
 Connection rating: 1 W
 Gas connection rating: 11500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Energy input: Gas
 Gas type preset: Nat gas H/E/(L) 20 (25) mbar
 Certified gas types: Liquid gas G30,31 28-30/37mbar
 Plug type: No plug (electrical connection by electrician)
 Appliance Dimensions (h x w x d) (in): x x
 Dimensions of the packed product: 6.69 x 25.98 x 44.09
 Net weight: 51.000 lbs
 Gross weight: 58.000 lbs
 Total number of positions that can be used at the same time: 5
 Length electrical supply cord: 100 cm
 Required niche size for installation (HxWxD): 45 x 850-850 x 490-500 mm
 Dimensions: 45x915x520 mm
 Dimensions of the packed product (HxWxD): 170x1120x660 mm
 Net weight: 22.9 kg
 Gross weight: 26.3 kg

Series 6, Gas hob, 90 cm, Tempered glass, Black PPM9A6I40

- Connected load: 11.5 KW

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

Design

- Tempered glass hob surface, black
- Two built-in options: install the hob either flush or slightly raised on the worktop
- Semi-continuous cast iron pan supports
- Metal knobs

Usage convenience

- FlameSelect: precisely adjust the flame in nine defined and repeatable levels.
- Sword knobs, front: easily access knobs in front with strong grip for effortless turning.
- Automatic ignition: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Left: Wok burner up to 4 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Cleaning

- Removable knobs for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Semi-continuous cast iron pan supports: little weight and compact form, yet high stability due to continuous surface.

Safety


- Safety gas cut-off: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Preset for natural gas (20mbar)
- Nozzle set for Preset for natural gas (20mbar). Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Required niche size for flush installation (HxWxD mm): 45 x 919 x 524
- Min. worktop thickness: 20 mm
- For raised installation, it is possible to install in worktops that are between 12 mm and 20 mm by using a spacer, which is available from technical customer service.
- If installed flush, minimum worktop thickness is 30 mm.
- Power cord: 1 m

Series 6, Gas hob, 90 cm, Tempered glass, Black PPM9A6I40

Measurements in mm

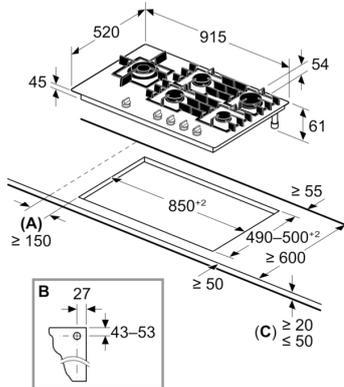

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven

For worktop thickness between 12 mm to 20 mm need additional spacer, contact customer service for details