


Series 4, canopy cooker hood, 75 cm, Silver metallic DHL755BM

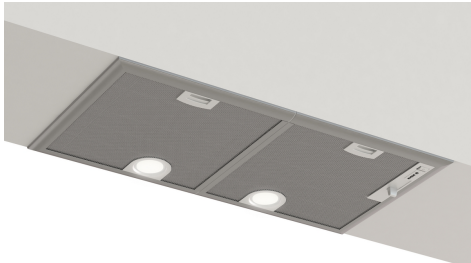

- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- **Silence:** maximal extractor performance with little noise
- **Grease filtration level:** filters out over 85% of the grease from kitchen air

Technical Data

Typology:	Built-in/Built-under
Length electrical supply cord:	130 cm
Required niche size for installation (HxWxD):	... 215mm x 700.0mm x 350mm mm
Net weight:	8.0 kg
Type of control:	mechanical
Number of speed settings:	3-stages + intensive setting
Max. air extraction:	468 m ³ /h
Boost position output recirculating:	324.0 m ³ /h
Max. air recirculation:	281 m ³ /h
Boost position air extraction:	614 m ³ /h
Number of lights:	2
Noise level:	63 dB(A) re 1pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable aluminium
Odour filter:	No
Operating Mode:	Exhaust / Recirculation (Accessory available separately)
Optional accessories:	DHZ7305, DHZ7402
Type of lamps used:	Not applicable
Total power of the lamps:	6 W
Grease filter type:	Kassette
Clean filter reminders:	No
Connection rating:	206 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	Gardy plug w/ earthing
Installation typology:	Built-in
Body material:	Lacquered
Plug type:	Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in):x x
Dimensions of the packed product:	11.41 x 30.70 x 17.32
Net weight:	18.000 lbs
Gross weight:	20.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	No
Length electrical supply cord:	130 cm
Dimensions of the packed product (HxWxD):290x780x440 mm
Net weight:	8.0 kg
Gross weight:	9.2 kg

Optional accessories

DHZ7305	Standard odor filter
DHZ7402	Installation kit for canopy



Series 4, canopy cooker hood, 75 cm, Silver metallic DHL755BM

- Diameter pipe Ø 150 mm

Design:

- Canopy silver metallic
- For installation in a modified cupboard, above a hob
- Suitable for ducted or re-circulated extraction

Core Features:

- Capacitor motor
- 2 x LED spot 2,15W (low volt)
- Colour Temperature: 3500 K
- Light Intensity: 410 lux
- 2 metal grease filter(s)

Comfort Features:

- Sliding switch control
- 3 speeds plus intensive setting

Cleaning Comfort:

- Metal grease filter dishwasher-safe

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 229 m³/h; noise level 46 dB(A) re1pW
- Speed 2: extraction rate 371 m³/h; noise level 57 dB(A) re1pW
- Speed 3: extraction rate 468 m³/h; noise level 63 dB(A) re1pW
- Intensive Speed 1: extraction rate 614 m³/h; noise level 68 dB (A) re1pW
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 88.1 kWh/year
- Blower Efficiency Class: D
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B

Performance Recirculation:

- For recirculated extraction standard odor filter (accessory) needed
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 140 m³/h; noise level 56 dB(A) re1pW
- Speed 2: extraction rate 231 m³/h; noise level 67 dB(A) re1pW
- Speed 3: extraction rate 281 m³/h ; noise level 70 dB(A) re1pW
- Intensive Speed 1: extraction rate 324 m³/h; noise level 73 dB (A) re1pW


Technical Information and Sustainability:

- Consumption data:
- Power rating: 206 W
- Voltage: 220 - 240 V
- Sustainability:
- Made in Germany: produced at a CO₂ neutral production site


Planning and Installation Information:

- Dimensions (HxWxD): 215 x 730 x 380 mm
- Built-in dimensions (HxWxD): 215 mm x 700 mm x 350 mm
- Electrical cable length 1.3 m


**Series 4, canopy cooker hood, 75 cm,
Silver metallic
DHL755BM**

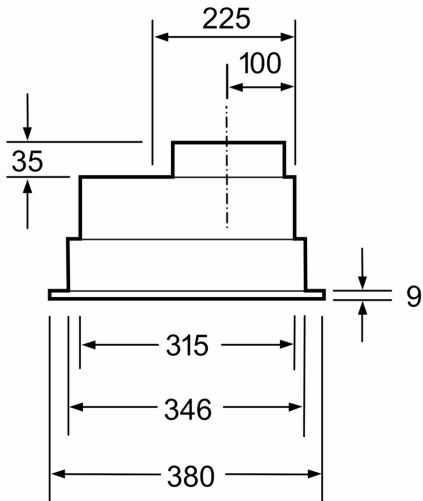


measurements in mm

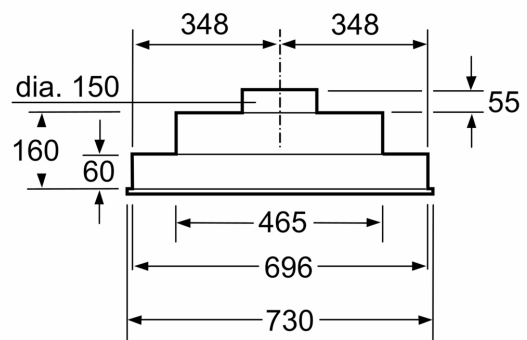

measurements in mm

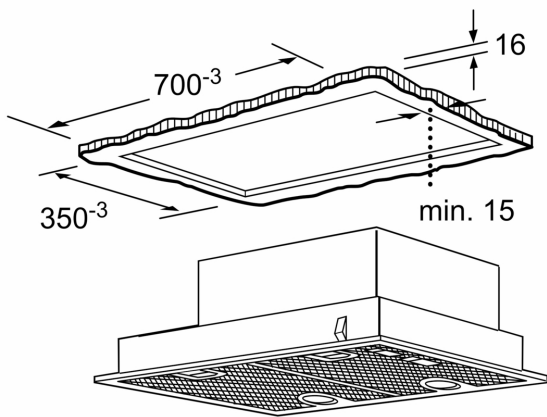

measurements in mm

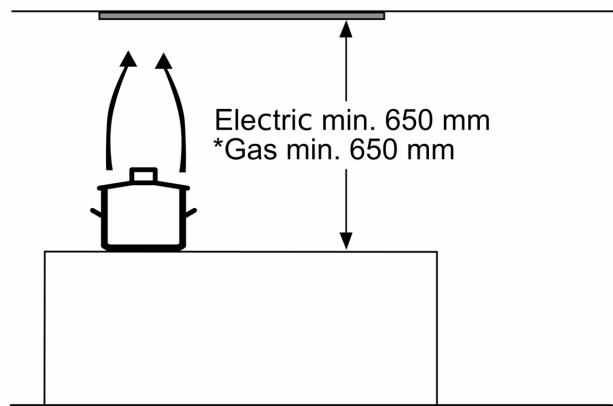

* from upper edge of pan support

measurements in mm