


Series 4, canopy cooker hood, 53 cm, Silver metallic DHL555BM

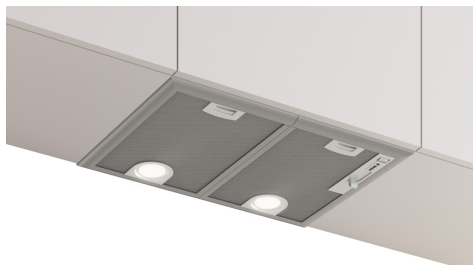

DHZ7305 Standard odor filter

• **Silence:** maximal extractor performance with little noise

Typology: Built-in/Built-under
 Length electrical supply cord: 130 cm
 Required niche size for installation (HxWxD): ... 215mm x 500.0mm x 350mm mm
 Net weight: 7.2 kg
 Type of control: mechanical
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 460 m³/h
 Boost position output recirculating: 346.0 m³/h
 Max. air recirculation: 302 m³/h
 Boost position air extraction: 604 m³/h
 Number of lights: 2
 Noise level: 63 dB(A) re 1 pW
 Diameter of air outlet: 150 mm
 Grease filter material: Washable aluminium
 Odour filter: No
 Operating Mode: Exhaust / Recirculation (Accessory available separately)
 Type of lamps used: None
 Total power of the lamps: 6 W
 Grease filter type: Kassette
 Clean filter reminders: No
 Connection rating: 206 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: Gardy plug w/ earthing
 Installation typology: Built-in
 Material body: Lacquered
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 11.41 x 23.22 x 17.32
 Net weight: 16.000 lbs
 Gross weight: 18.000 lbs
 Motor location: Integrated motor in hood body
 No-return airflow flap: No
 Length electrical supply cord: 130 cm
 Dimensions of the product, with chimney (if exists): 290x530x380 mm
 Dimensions of the packed product (HxWxD): 290x590x440 mm
 Net weight: 7.2 kg
 Gross weight: 8.2 kg



4 242005 539772

Series 4, canopy cooker hood, 53 cm, Silver metallic DHL555BM

Design:

- Canopy silver metallic
- For installation in a modified cupboard, above a hob
- Suitable for ducted or re-circulated extraction

Core Features:

- Capacitor motor
- 2 x LED spot 2,15W (low volt)
- Colour Temperature: 3500 K
- Light Intensity: 438 lux
- 2 metal grease filter(s).

Comfort Features:

- 3 speeds plus intensive setting

Cleaning Comfort:

- Metal grease filter dishwasher-safe
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 224 m³/h; noise level 46 dB (A) re1pW Speed 2: extraction rate 365 m³/h; noise level 57 dB (A) re1pW Speed 3: extraction rate 460 m³/h; noise level 63 dB (A) re1pW Intensive 1: extraction rate 604 m³/h; noise level 68 dB (A) re1pW
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 89.4 kWh/year
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- For recirculated extraction standard odor filter (accessory) needed


Technical Information and Sustainability:

- Consumption data:
- Power rating: 206 W
- Voltage: 220 - 240 V
- Sustainability:
- Made in Germany: produced at a CO₂ neutral production site


Planning and Installation Information:

- Dimensions (HxWxD): 215 x 530 x 380 mm
- Built-in dimensions (HxWxD): 215 x 500 x 350 mm
- Electrical cable length 1.3 m


**Series 4, canopy cooker hood, 53 cm,
Silver metallic
DHL555BM**

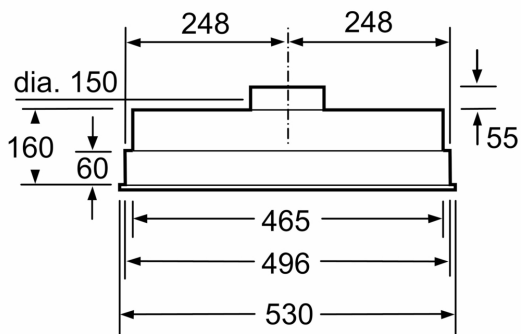


measurements in mm

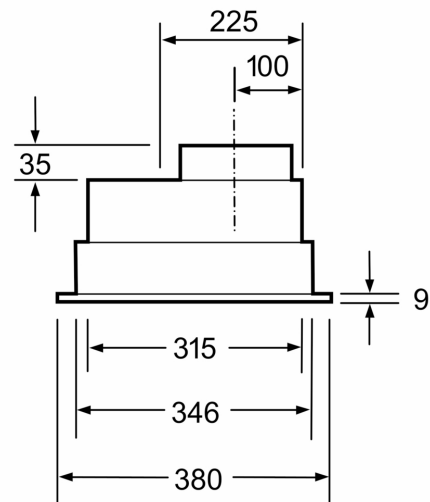

measurements in mm

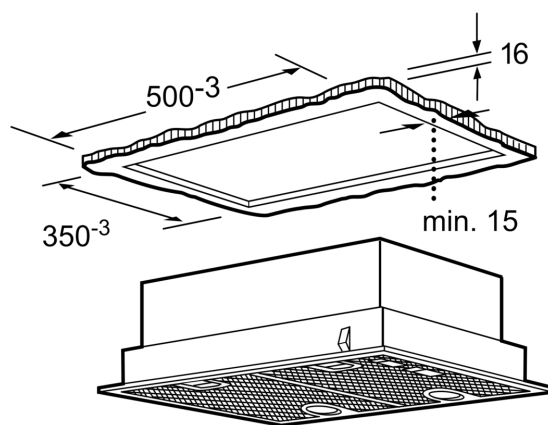

measurements in mm

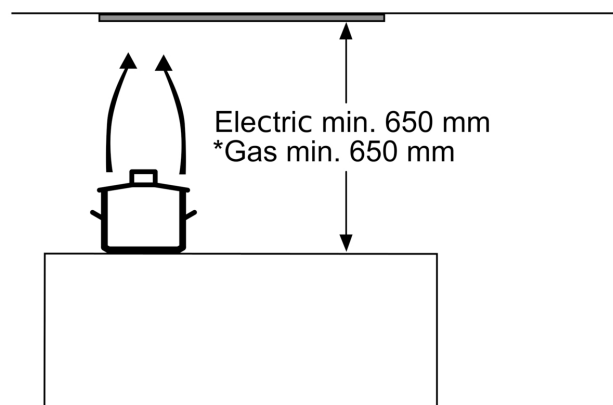

* from upper edge of pan support

measurements in mm