


iQ700, Gas hob, 90 cm, Tempered glass, Black ER9A6SH40

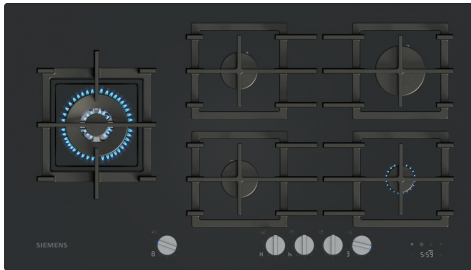

Optional accessories

Tempered glass gas hob with stepFlame Technology for precise flame control, intelligent hob-hood-control, detachable knobs and semi-continuous pan supports for an easy cleaning.

- ✓ stepFlame Technology: Precise flame control with nine different settings
- ✓ cookConnect: Control different functions of your hood, like power level or light, directly from your hob (with Siemens matching hood)
- ✓ Intelligent hood automatic: The hood is synced to your hob for maximum convenience
- ✓ Home Connect: Enjoy more peace of mind
- ✓ Detachable metallic sword knobs: Easily removable for easy cleaning and precise cooking control

Features

HZ298105	Simmer plate
HZ298107	Wok ring
HZ298114	Small pot support
HZ32WA00	wireless roastingSensor
HZ9SE040	4 pieces Set
HZ9SE060	6 pieces Set

Product name/family: gas hob w
integrated controls

Design: Built-in

Source of energy: Gas

Total number of positions that can be used at the same time: 5

Required niche size for installation (HxWxD): 45 x 850-850 x
490-500 mm

Width of the appliance: 915 mm

Dimensions: 45x915x520 mm

Dimensions of the packed product (HxWxD): 170x1110x660 mm

Net weight: 24.2 kg

Gross weight: 27.6 kg

Residual heat indicator:yes

Location of control panel: Front

Basic surface material: Tempered glass

Color of surface: Black

Color of frame: Black

Length electrical supply cord: 100 cm

Knob Material: Full metal

Sealed Burners: No

Power of 2nd heating element (kW): 5000 W

Power of 4th heating element (kW): 1750.00 W

Power of 5th heating element (kW): 3000 W

Connection rating: 2 W

Gas connection rating: 12500 W

Fuse protection: 3 A

Voltage: 220-240 V

Frequency: 50; 60 Hz

Source of energy: Gas

Gas type preset: Nat gas H/E(L) 20 (25) mbar

Certified gas types: Liquid gas G30,31
28-30/37mbar

Plug type: No plug
(electrical connection by electrician)

Appliance Dimensions (h x w x d) (in): x x

Dimensions of the packed product: 6.69 x 25.98 x 43.70

Net weight: 53.000 lbs

Gross weight: 61.000 lbs

Total number of positions that can be used at the same time: 5

Length electrical supply cord: 100 cm

Required niche size for installation (HxWxD): 45 x 850-850 x
490-500 mm

Dimensions: 45x915x520 mm

Dimensions of the packed product (HxWxD): 170x1110x660 mm

Net weight: 24.2 kg

Gross weight: 27.6 kg



iQ700, Gas hob, 90 cm, Tempered glass, Black ER9A6SH40

Features

Design

- Tempered glass hob surface, black
- Two built-in options: install the hob either flush or slightly raised on the worktop
- Semi-continuous cast iron pan supports
- Illuminated, Metal knobs

Usage convenience

- stepFlame Technology: precisely adjust the flame in nine defined and repeatable levels.
- Digital display: see the selected power level and the residual heat.
- Sword knobs, front: easily access knobs in front with strong grip for effortless turning.
- Automatic ignition via control knobs: just push and turn the knob to ignite the flame.
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).

Burners and power

- 5 Gas burners
- Including Dual wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 5 KW (depending on gas type)
- Center front: Standard burner up to 1.75 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- Removable knobs for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Semi-continuous cast iron pan supports: little weight and compact form, yet high stability due to continuous surface.

Safety

- Gas Safety Lock: prevents unwanted gas flow when flame goes out.
- Residual heat indicator: indicates which burner parts and pan supports are still hot.

Connectivity

- Home Connect : check if the hob is switched off even when not at home and find additional functions in the Home Connect app.
- cookConnect system (with matching hood) : automatically activates the hood when cooking, thanks to the WiFi connection of hob and suitable hood.
- Intelligent hood automatic (available after software update): hood automatically adapts fan speed thanks to hob continuously providing cooking data (with all current Inclined hoods with Home Connect and connected Home Connect account).
- Sound volume of Touch control adaptable to personal preference and needs (via app).

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar


- Preset for natural gas (20mbar)
- Preset for natural gas (20mbar). Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Required niche size for flush installation (HxWxD mm): 45 x 919 x 524
- Min. worktop thickness: 20 mm
- For raised installation, it is possible to install in worktops that are between 12 mm and 20 mm by using a spacer, which is available from technical customer service.
- If installed flush, minimum worktop tickness is 30 mm.
- Power cord: 1 m
- Connected load: 12.5 KW

Accessories

- Liquid gas nozzles (28-30/37mbar) included

**iQ700, Gas hob, 90 cm, Tempered glass, Black
ER9A6SH40**

Dimensioned drawings

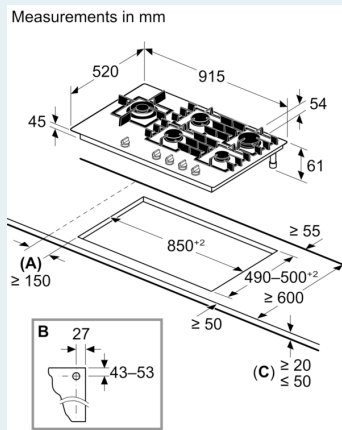

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven

For worktop thickness between 12 mm to 20 mm need additional spacer, contact customer service for details